


Street Canyon Tool

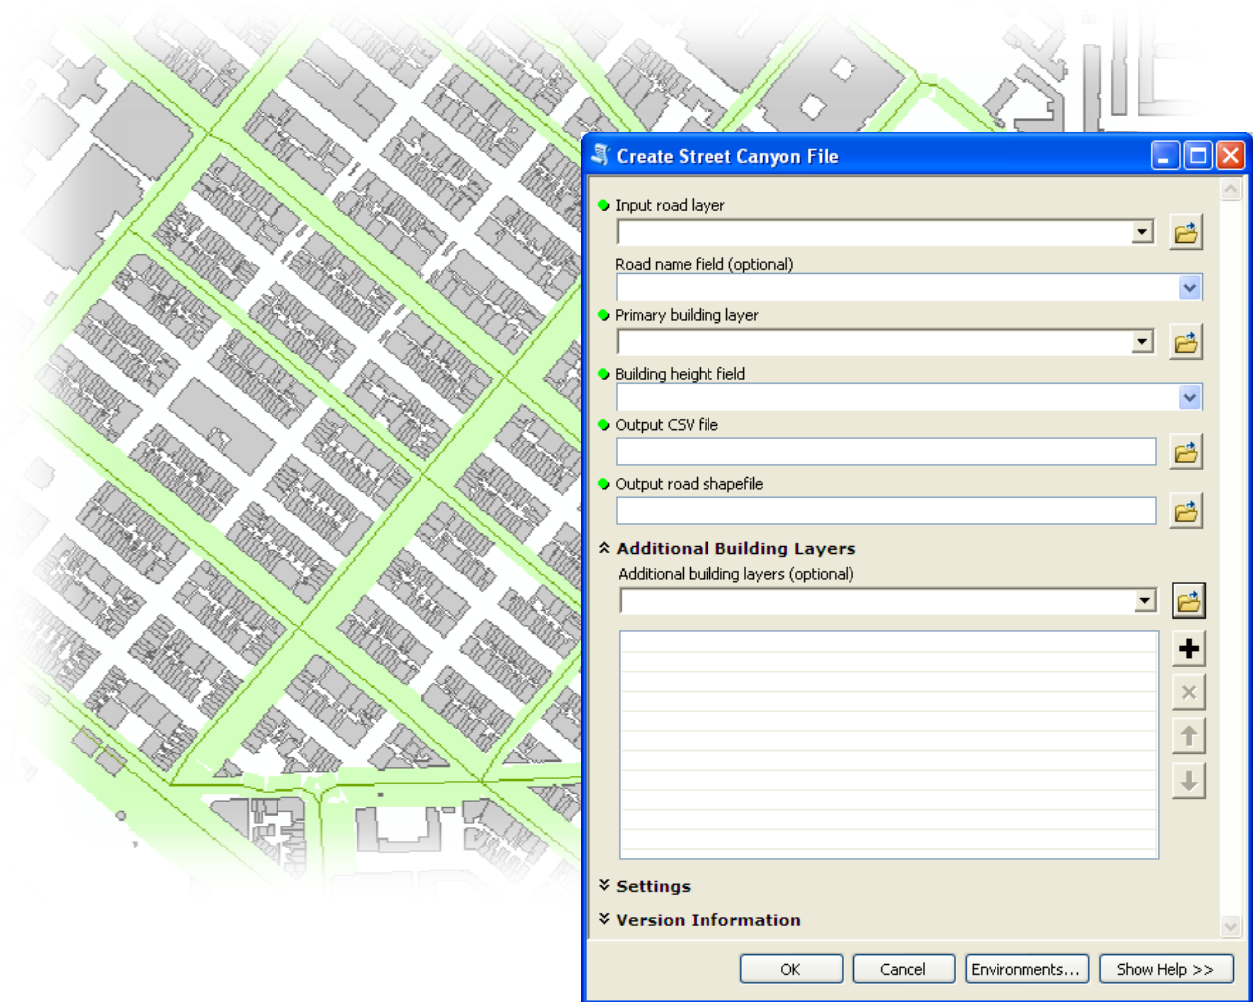

User Guide

CERC

ADMS

Street Canyon Tool

User Guide

Version 2.0

June 2014

Cambridge Environmental Research Consultants Ltd.
3, King's Parade
Cambridge
CB2 1SJ
UK

Telephone: +44 (0)1223 357773
Facsimile: +44 (0)1223 357492
Email: help@cerc.co.uk
Website: www.cerc.co.uk

Contents

SECTION 1	Introduction	1
1.1	About the Street Canyon Tool.....	1
1.2	Features.....	1
1.3	Requirements.....	1
1.4	About this user guide.....	1
SECTION 2	Using the Street Canyon Tool.....	3
2.1	Installing the Street Canyon Tool	3
2.2	Running the Street Canyon Tool.....	4
2.3	Create Street Canyon File Tool	4
2.3.1	Input road layer	5
2.3.2	Road name field	6
2.3.3	Primary building layer	6
2.3.4	Building height field	6
2.3.5	Output CSV file	6
2.3.6	Output road shapefile	6
2.3.7	Additional building layers	6
2.3.8	Settings	7
2.3.9	Version Information	9
2.3.10	Running the Tool	9
2.4	Monitoring Progress.....	9
2.5	Viewing the results	10
2.5.1	Output CSV file	10
2.5.2	Road Layer shapefile	10
2.6	Display Canyon Widths Tool	11
2.6.1	Road layer	11
2.6.2	Road width (left)	12
2.6.3	Road width (right)	12
2.6.4	Output shapefile	12
2.6.5	Version Information	12
2.6.6	Running the Tool	12
SECTION 3	Technical Summary	15
3.1	The Advanced Canyon module input data.....	15
3.2	The Create Street Canyon File tool.....	16
3.2.1	Locating buildings that affect a road source	16
3.2.2	Calculating the Advanced Canyon module parameters	18

SECTION 1 Introduction

1.1 About the Street Canyon Tool

The Street Canyon Tool generates street canyon data for use with the ADMS-Urban Advanced Canyon module, including canyon width, length and height. The Street Canyon Tool runs inside ArcGIS and uses building and road datasets to calculate Advanced Canyon parameters.

1.2 Features

The Street Canyon Tool can be used to calculate the following for each road:

- Canyon heights (maximum, mean and minimum)
- Canyon widths
- Canyon length

The data is available as a new shapefile based on the input road layer, with new fields for the data and in a *.csv format suitable for use with the ADMS-Urban module.

1.3 Requirements

The Street Canyon Tool toolbox requires the following:

- A copy of ESRI ArcGIS (Version 10.1 or later)

1.4 About this user guide


This *Street Canyon Tool User Guide* is a manual describing how to use the Street Canyon Tool.

To make this manual simpler to use, certain conventions have been followed with regard to layout and style.

- Canyon Height toolbox interface controls are shown in Arial font, e.g. click on Generate Report.
- Keyboard inputs are shown in **bold**, e.g. press **Enter**.
- Directory and file names are shown in *italics*, e.g. *.nc.
- Table and figure references are shown in **bold**, e.g. see **Figure 3.1**

SECTION 2 Using the Street Canyon Tool

2.1 Installing the Street Canyon Tool

To install the Street Canyon Tool, simply copy the contents of the install directory to a directory with full privileges on your machine. From the Start menu, open ArcCatalog. Open the ArcToolbox window ( on the toolbar), right-click on the ArcToolbox window (see **Figure 1**) and select Add Toolbox...

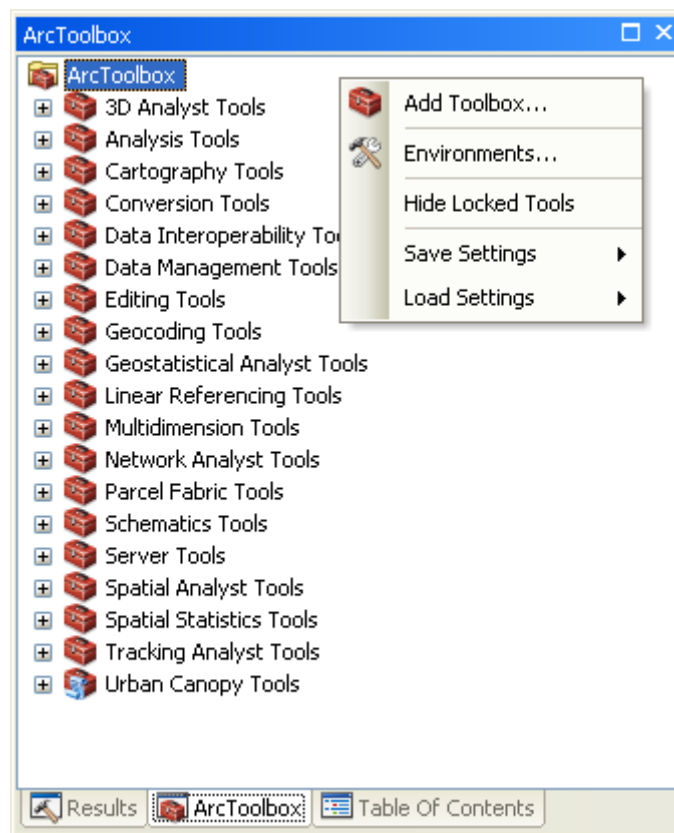


Figure 1 - The ArcToolbox

Navigate to the folder containing the Street Canyon Tool files and select StreetCanyon.pyt. Street Canyon Tools should now appear in the ArcToolbox in ArcCatalog and also in ArcMap, as shown in **Figure 2** below. The toolbox has two tools, named Create Street Canyon File and Display Canyon Widths.

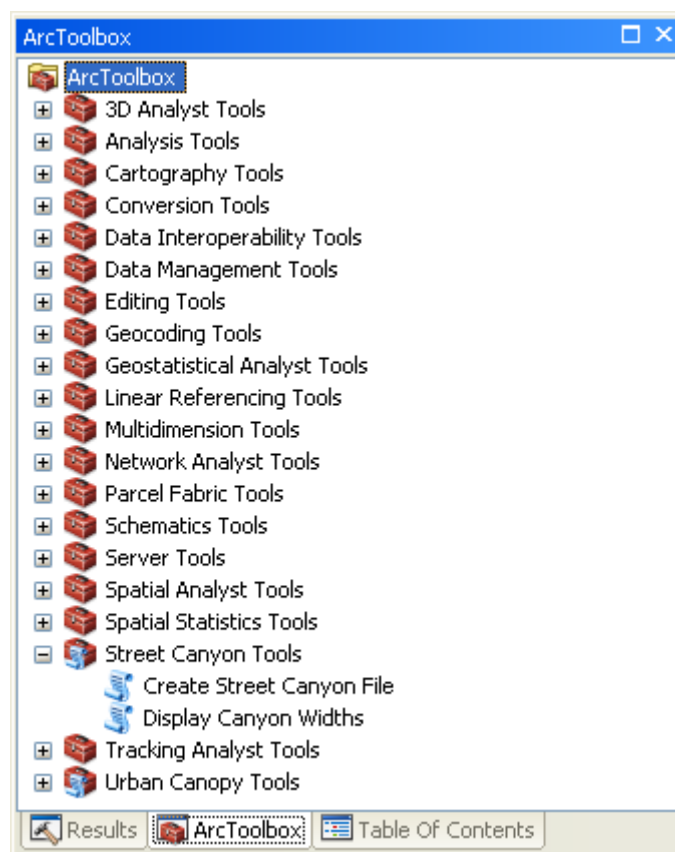


Figure 2 - The Street Canyon Tools toolbox

2.2 Running the Street Canyon Tool

Once Street Canyon Tools has been added to the ArcGIS' ArcToolbox window (refer to Section 2.1 Installing the Street Canyon Tool) it can be used by clicking on Street Canyon Tools to reveal the Create Street Canyon File tool.

The user is advised (though not required) to load the required roads and building shapefiles into ArcGIS before running the tool. The input layers must be shapefiles, not (for example) geodatabase layers. All input shapefiles must be in the same coordinate system. This must be a projected coordinate system with units of metres.

Also the input layers must not have been created from ArcGIS's "Make Feature Layer" tool with the "Use Ratio Policy" option.

2.3 Create Street Canyon File Tool

The main screen, shown in **Figure 3**, appears on clicking on the Create Street Canyon File tool in the Street Canyon Tools toolbox. Each of the features and buttons are described below.

In the Create Street Canyon File main screen, click on Show Help >> to display information relating to each input.

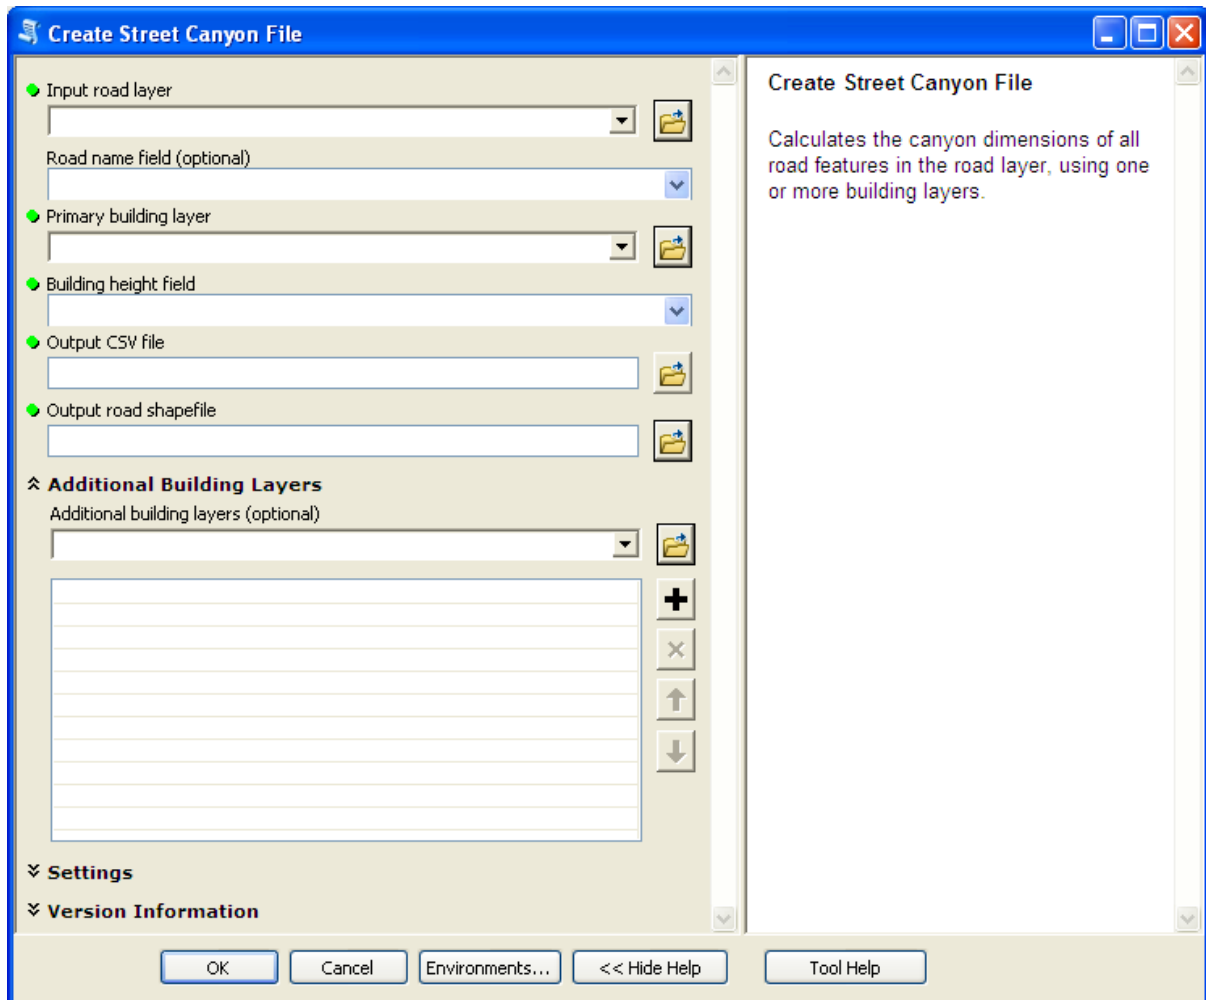



Figure 3 – The main screen

2.3.1 Input road layer

The **Input road layer** is the shapefile containing the road geometry for each road feature. The road layer can be selected by using the dropdown, if the layer is already loaded in ArcGIS, or by clicking the **Browse**  button to navigate to and select the shapefile.

*The **Input road layer** shapefile must use a coordinate system with units of metres.*


*If specific features in this shapefile are selected in ArcGIS, the **Create Street Canyon Tool** will output the results for these specific features only. If no features are selected, the **Create Street Canyon Tool** will output results for all features.*

2.3.2 Road name field

The Road name field is the field in the Road Layer storing the name of the road.

*The road names in the Road name field must match those in the ADMS-Urban *.upl file.*

2.3.3 Primary building layer

The Primary building layer is a shapefile containing building geometry and building height information for each building feature. The primary building layer can be selected by using the dropdown, if the layer is already loaded in ArcGIS, or by clicking the Browse  button to navigate to and select the shapefile.

The Primary building layer shapefile must use a coordinate system with units of metres.

The tool may run faster if buildings with height lower than 1m are manually deleted before running the tool.

2.3.4 Building height field

The Building height field is the field in the Primary building layer which stores the building height information for each building feature. The building height should be the height above ground level and should be in metres.

2.3.5 Output CSV file

The Output CSV file defines the location for the *.csv results, for use with the ADMS-Urban Advanced Canyon module.

2.3.6 Output road shapefile

The Output road shapefile defines the location for the *.shp results. This shapefile contains the attributes from the input shapefile as well as the calculated canyon statistics.

2.3.7 Additional building layers

The Additional building layers section enables users to provide extra building layers. Additional building layers may be required if the building data is provided in tiles, or if there are multiple layers for different building types.

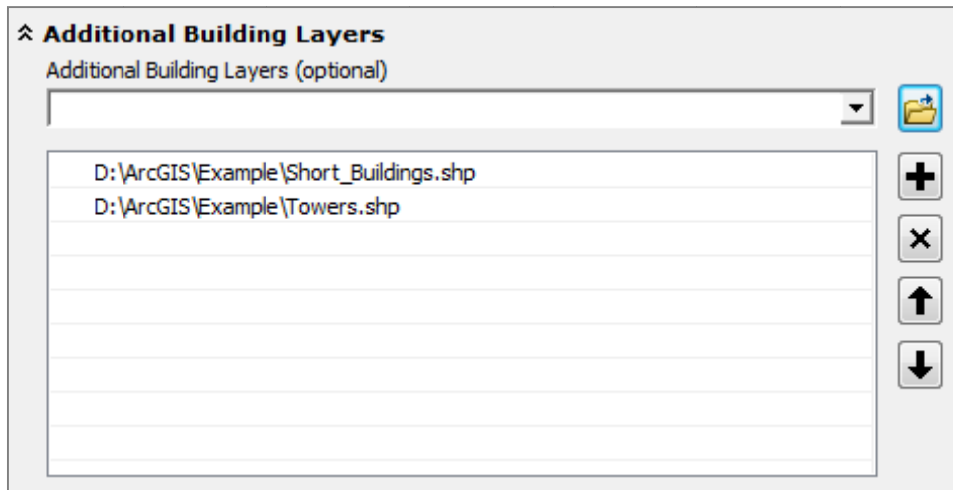



Figure 4 – The Additional Building Layers section

2.3.7.1 Additional building layers

Additional building layers can be selected by using the dropdown, if the layers are already loaded in ArcGIS, or by using the **BROWSE** button to navigate to and select the shapefile. Layers can be removed from the list by using the  button to the right of the list.

The Additional building layers shapefile(s) must be in the same coordinate system as the Primary building layer (refer to Section 2.3.3) and must have the same name for the Building height field.

2.3.8 Settings

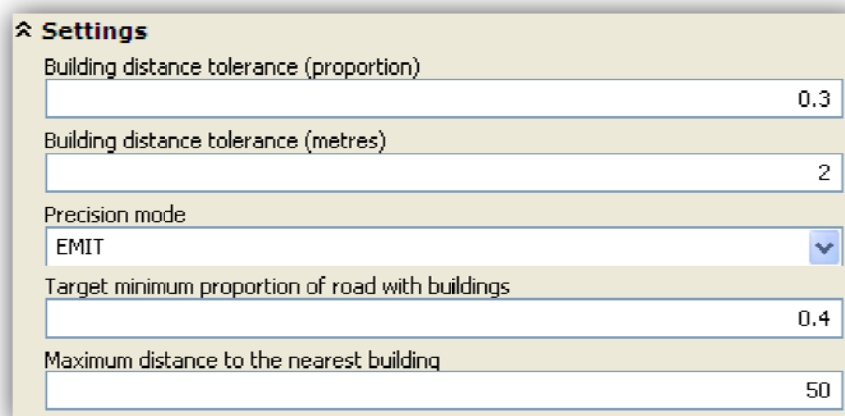


Figure 5 – The Settings section

Appropriate values for all of the settings must be determined for the cityscape. A degree of experimentation may be necessary. Section 2.3.8.6 gives some values used by CERC in recent case studies.

2.3.8.1 Building distance tolerance (proportion)

The Building distance tolerance settings define a region beyond the base building. Any buildings, or building parts, in this region will be included in the canyon height calculations.

The Building distance tolerance is a combination of a proportion of the minimum distance (from the road centreline to the nearest building) and a constant distance. The **Building distance tolerance (proportion)** defines the proportion used. For example, a proportion of 0.5 would include buildings that are within half the minimum distance beyond the nearest building.

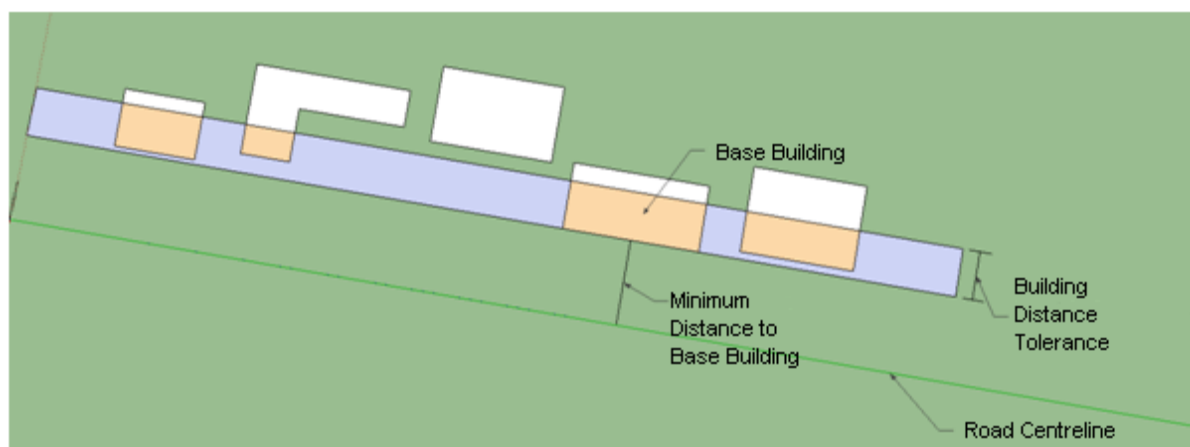


Figure 6 – Building distance tolerance

2.3.8.2 Building distance tolerance (metres)

Refer to Section 2.3.8.1 for a description of the building distance tolerance.

The **Building distance tolerance (metres)** defines the constant component of the distance tolerance. For example, a setting of 2 would include buildings that are within 2 metres beyond the nearest building, as illustrated in **Figure 6**.

2.3.8.3 Precision mode

The Precision mode defines the precision of the results.

In EMIT mode, vertices and results are rounded to the nearest metre. In ADMS mode they are rounded to the nearest centimetre. These are set to match the requirements of the EMIT and ADMS models.

2.3.8.4 Target minimum proportion of road with buildings

The **Target minimum proportion of road with buildings** defines the goal used when the algorithm chooses the base building (see Technical Summary). The proportion of road with buildings is the proportion between the canyon coverage and the canyon length, e.g. 0.5 would expect 50% or more of the canyon's length to contain buildings.

In cases where some buildings on a road side are offset from others, larger values of this parameter may cause small buildings near the road centreline to be ignored, leading to the

calculation of wider canyons that have greater canyon coverage (see **Figure 12**).

2.3.8.5 Maximum distance to the nearest building

The Maximum distance to the nearest building defines the distance from the road centreline the tool will search to find suitable base buildings. If there are no buildings within this distance, the canyon statistics for this road's side will be zero.

2.3.8.6 Example settings

Appropriate values must be determined for the cityscape being modelled. **Table 1** below shows values used by CERC for some recent case studies.

Case study:	London	Hong Kong
Building distance tolerance (proportion)	0.3	0.3
Building distance tolerance (metres)	14	14
Target minimum proportion of road with buildings	0.0	0.4
Maximum distance to the nearest building	40	50

Table 1 – Example setting values

2.3.9 Version Information

The Version Information section contains information about the version of the tool. This information should be included in any correspondence with CERC.

2.3.10 Running the Tool

Clicking OK will run the tool. The ArcMap window will display scrolling text at the bottom right, indicating that the tool is running.

2.4 Monitoring Progress

In ArcMap, under the Geoprocessing menu, open the Results window. The top entry in the Current Session will be the tool in progress. The Inputs menu gives details of the tool inputs selected. The Messages menu displays progress messages from the tool. It is possible to cancel the tool run, by right-clicking on the tool in progress and clicking Cancel.

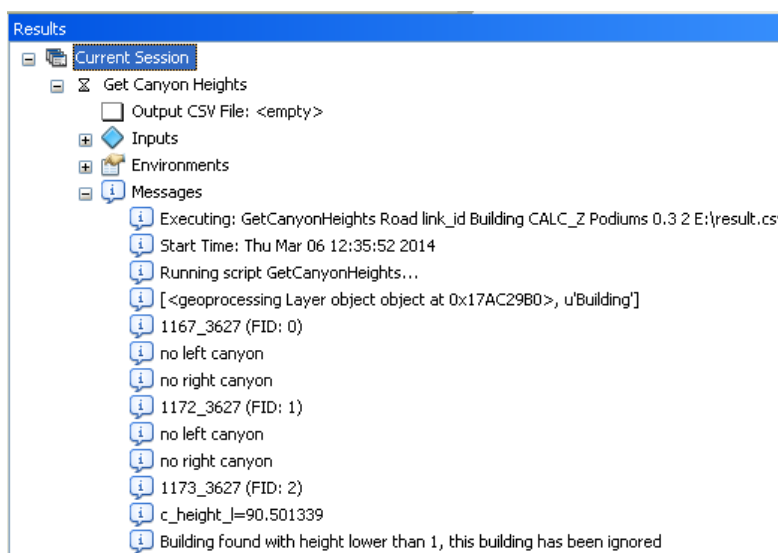


Figure 7 – The Results window in ArcGIS Geoprocessing

2.5 Viewing the results

2.5.1 Output CSV file


The results will be available in the *.csv file selected in Output CSV file, as shown in **Figure 8**

A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P
AdvancedCanyonVersion1															
ID	Name	X1	Y1	X2	Y2	width_L	avgHeight_L	minHeight_L	maxHeight_L	canyonLength_L	endLength_L	buildLength_L	width_R	avgHeight_R	minHeight_R
0	road1	528337	179824	528282	179826	6.06	29.8	9.54	29.8	55.04	0	55.04	0	0	0
1	road10	532752	180245	532729	180257	5.66	25.76	16.71	25.76	25.94	0	25.94	0	0	0
2	road100	528318	181815	528306	181823	4.6	18.64	17.08	18.9	14.42	0	14.42	14.59	24.17	8.71
3	road10003	531887	174420	532016	174307	18.43	13.41	5.01	18.35	179.69	0	179.69	8.15	17.27	13.81
4	road10004	536664	175393	536891	175957	34.01	21.75	5.12	32.73	607.97	0	607.97	48.61	30.35	5.17
5	road10005	529801	182699	529720	182649	22.03	41.82	13.25	64.95	83.91	11.28	74.69	28.94	23.8	5.22

Figure 8 – Example *.csv output

The results include the headers and parameters required to use the file with the ADMS-Urban Advanced Canyon option without any editing.

2.5.2 Road Layer shapefile

The resulting street canyon parameters will be added to the output road shapefile. The results can be read from the Attributes Table, as presented in **Figure 9**. Alternatively, the shapefile data can be viewed in the map by using the Identify tool  on any of the road features in the Road Layer.

The Display Canyon Widths tool can also be used, refer to Section 2.6 for more information.

c_width_l	c_length_l	c_height_l	c_start_l	c_minh_l	c_maxh_l	c_cover_l	c_width_r	c_length_r	c_height_r	c_start_r	c_minh_r	c_maxh_r	c_cover_r
9.02	61.02	37.4	14.25	37.4	37.4	61.02	6.09	55.5	48.82	14.03	17.7	77.6	43.44
6.07	60.92	23.25	1.32	8.9	87.5	52.49	9.44	61.18	36.02	1.48	23.1	67.7	44.01
0.4	87.49	22.8	63.93	10.6	28	72.25	2.37	131.2	30.95	5.48	8.9	71.3	52.66
9.3	143.18	21.11	156.83	5.7	66.7	53.1	0	0	0	0	0	0	0
26.37	124.52	23.21	53.36	14.4	31.6	62.45	10.4	60.6	9.66	74.92	4.8	22.1	34.01
0	0	0	0	0	0	0	9.77	24.06	19.6	6.31	19.6	19.6	24.06
3.13	74.5	28.07	26.26	27.4	32.6	48.99	0	0	0	0	0	0	0
1.26	66.89	45.1	15.7	45.1	45.1	66.89	19.95	66.24	68.41	12.56	17.2	89.9	60.78
4.16	50.75	33.12	0	21.2	62.3	50.75	8.9	62.74	39.78	22.64	11.5	93.1	59.33
32.63	372.48	9.5	0	4.2	13.2	121.84	11.49	257.33	28.87	126.82	4.8	111.3	193.53
10.11	162.52	18.09	0	11.6	45.1	151.83	16.2	7.84	4.6	44.56	4.6	4.6	7.84
3.45	161.02	59.45	25.02	6.8	149	152.73	18.23	198.51	45.2	14.08	5.1	89.9	57.19
16.09	7.77	3.1	67.8	3.1	3.1	2.77	12.43	111.86	27.57	0.69	5.5	87.4	66.71

Figure 9 – Example results in the Output road shapefile Attribute Table

2.6 Display Canyon Widths Tool

The Display Canyon Widths tool provides a visual representation of the results of the Street Canyon Tool.

The main screen, shown in **Figure 10**, appears on clicking on the Display Canyon Widths tool in Street Canyon Tools. Each of the features and buttons are described below.

In the Display Canyon Widths tool main screen, click on Show Help >> to display information

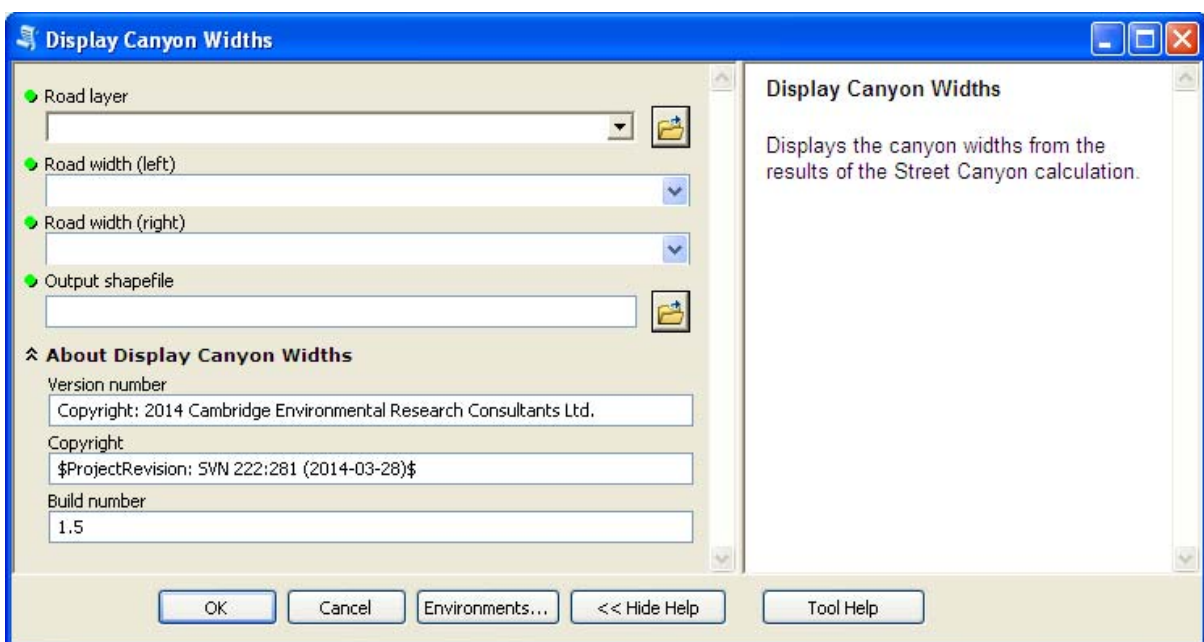



Figure 10 – The main Display Canyon Widths screen

2.6.1 Road layer

The Road layer is the shapefile containing the results of the Create Street Canyon File tool. The road layer can be selected by using the dropdown, if the layer is already loaded in ArcGIS, or by clicking the Browse  button to navigate to and select the shapefile.

*If specific features in this shapefile are selected in ArcGIS, the **Display Canyon Widths** tool will output the results for these specific features only. If no features are selected, the **Display Canyon Widths** tool will output results for all features.*

2.6.2 Road width (left)

Road width (left) is the field in the shapefile storing the road width for the left hand side of the road. When using a shapefile containing the results of the Street Canyon tool, this field will be `c_width_l`.

2.6.3 Road width (right)

Road width (right) is the field in the shapefile storing the road width for the right hand side of the road. When using a shapefile containing the results of the Street Canyon tool, this field will be `c_width_r`.

2.6.4 Output shapefile

The Output shapefile defines the location for the `*.shp` containing the canyon width polygons.

2.6.5 Version Information

The Version Information section contains information about the version of the tool. This information should be included in any correspondence with CERC.

2.6.6 Running the Tool

Clicking OK will run the tool. The ArcMap window will display scrolling text at the bottom right, indicating that the tool is running.

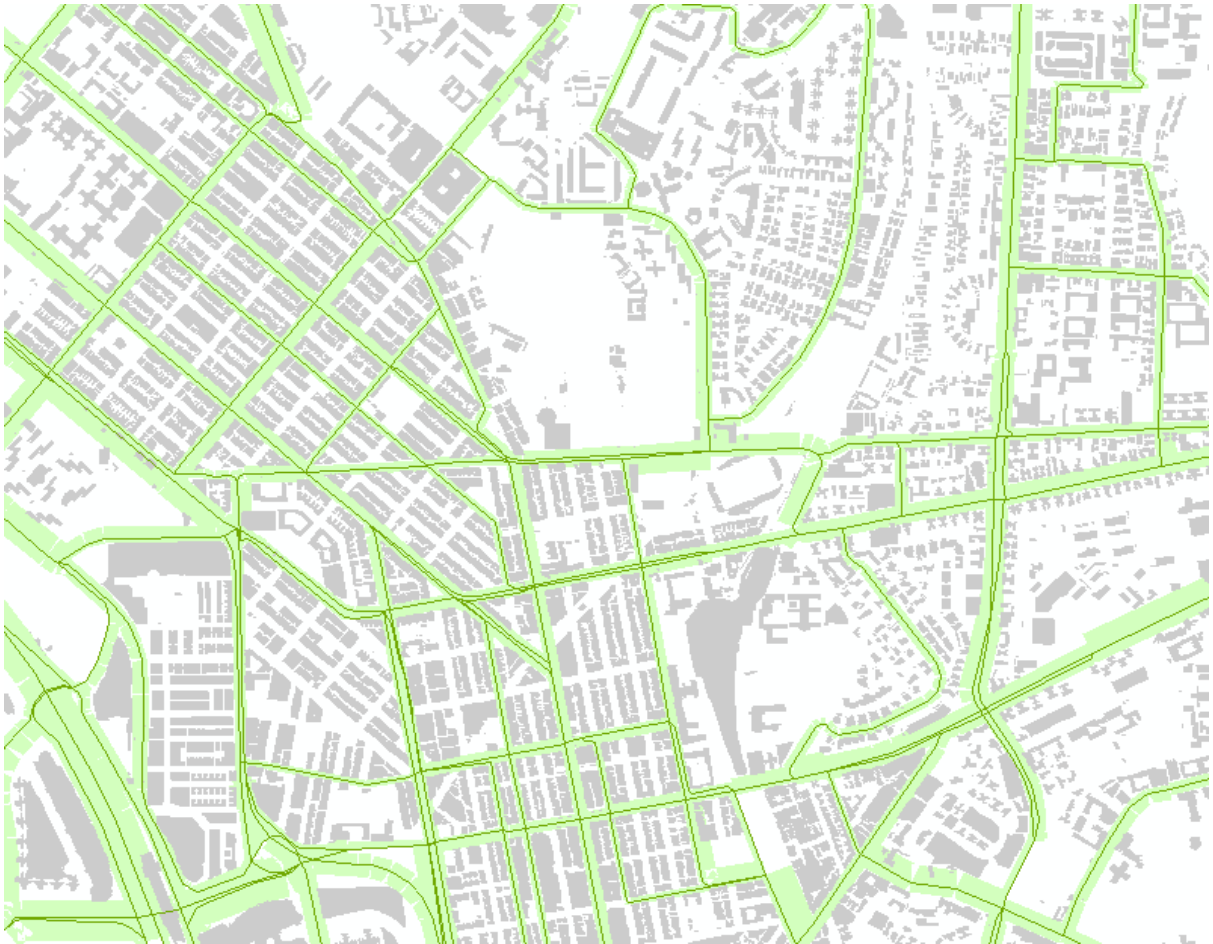


Figure 11 – Example Display Canyon Width output

SECTION 3 Technical Summary

This section provides a technical summary of the **Street Canyon Tools** toolbox. User-defined inputs to the tool are described in Section 2 of this User Guide.

The **Create Street Canyon File** tool generates a *.csv format file that can be used directly with the Advanced Canyon module in ADMS-Urban. The file outputs all of the required headers, together with averaged canyon parameter data, for each road feature in the **Input road layer**. A shapefile can also be output from the tool, containing the same information, which can be viewed spatially in GIS software. The **Display Canyon Width** tool can be used to visualise the canyon widths in ArcGIS.

3.1 The Advanced Canyon module input data

The parameters required by the ADMS-Urban Advanced Canyon module are described in **Table 2**. A schematic of the parameters is also presented in **Figure 12**, with the associated shapefile variable names.

Variable name in *.csv file	Variable name in shapefile	Units	Description
ID	ID	-	Source identifier (optional)
Name	Name	-	Source (road) name
X1, Y1	X1, Y1	m	x and y coordinates of first vertex (start)
X2, Y2	X2, Y2	m	x and y coordinates of second vertex (end of first segment)
width_L, width_R	c_width_l, c_width_r	m	Distance from road centreline to canyon wall on left and right sides respectively
avgHeight_L, avgHeight_R	c_height_l, c_height_r	m	Average canyon height on left and right sides respectively
minHeight_L, minHeight_R	c_minh_l, c_minh_r	m	Minimum canyon height on left and right sides respectively
maxHeight_L, maxHeight_R	c_maxh_l, c_maxh_r	m	Maximum canyon height on left and right sides respectively
canyonLength_L, canyonLength_R	c_length_l, c_length_r	m	Length of canyon on left and right sides respectively
endLength_L, endLength_R	c_start_l, c_start_r	m	Distance from start of road to first building in canyon on left and right sides respectively
buildLength_L, buildLength_R	c_cover_l, c_cover_r	m	Length of buildings in canyon on left and right sides respectively

Table 2 – ADMS-Urban Advanced Canyon module input parameters, which are output by the Street Canyon Tool

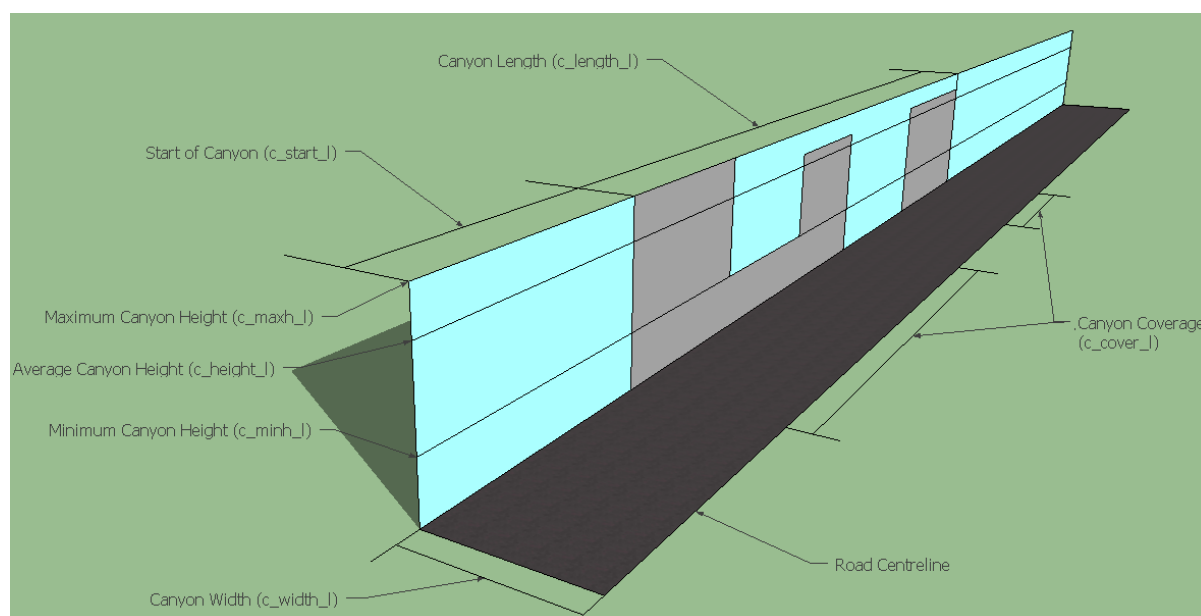


Figure 12 – Canyon height results (left hand side, as given in the Road Layer shapefile)

3.2 The Create Street Canyon File tool

3.2.1 Locating buildings that affect a road source

The Create Street Canyon File tool first identifies all buildings that may affect the road. It starts by finding all buildings within the tolerances defined by the user, as described in Sections 2.3.8.1 and 2.3.8.2.

The left and right sides of the canyon are assigned according to the orientation of the first and second vertices, where the first vertex represents the start and the second vertex represents the end of the first straight-line segment of the road. The left and right side calculations are carried out independently. Note that the order of the vertices will be checked against the road source data in ADMS-Urban, based on the road name.

For each road segment and each side of the road, the Create Street Canyon File tool:

- Finds a suitable base building close to the road on that side. If the Target minimum proportion of road with buildings is set to 0.0, the base building will be the nearest building to the road. For other values of Target minimum proportion of road with buildings, the selected base building may be further away in order to achieve better coverage. It selects the nearest building likely to satisfy the target minimum proportion, or if no building is likely to satisfy that proportion, it chooses the building likely to give the highest coverage.
- Calculates a buffer distance:

$$\text{Buffer} = (1 + f)x + b$$

where,

x is the minimum distance from the base building to the road centreline,

f is Building distance tolerance (proportion), and

b is Building distance tolerance (metres).

- Locates all building faces within the buffer distance, perpendicular to the road centreline.
- Stores the height and length of each building face as projected onto the road centreline, as illustrated in **Figure 13**.

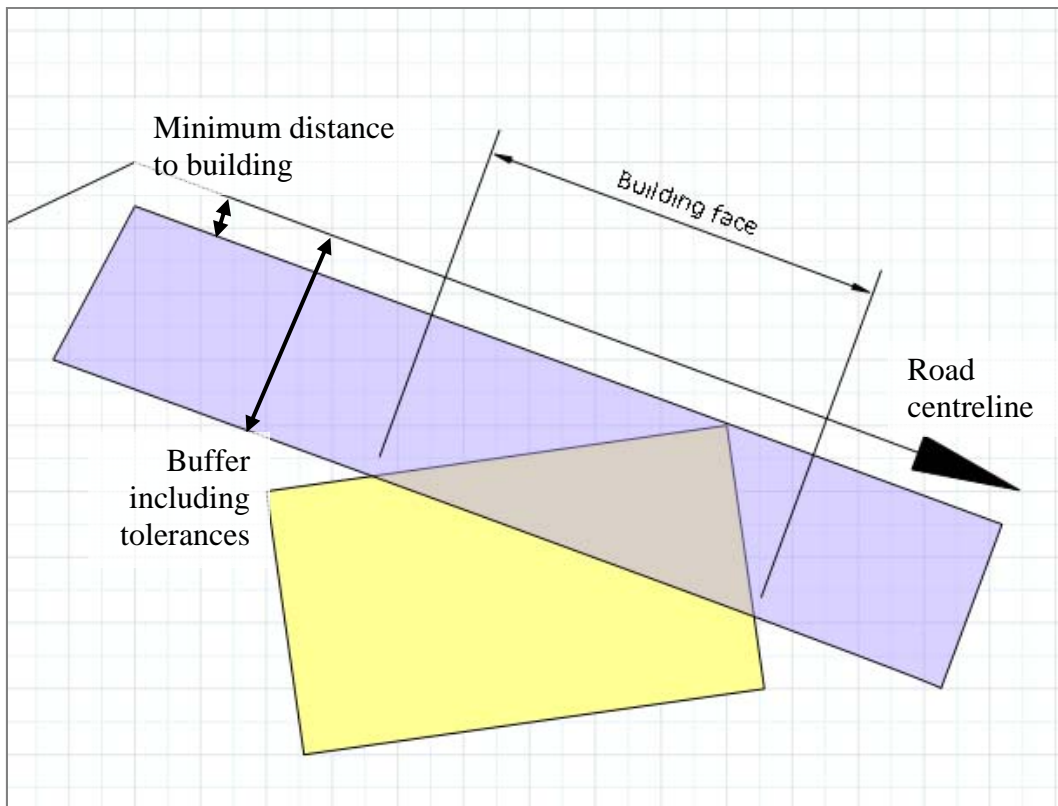


Figure 13 – Example tolerance distance for the right hand side of a road feature

When two or more buildings or buildings of varying height are found in the same location, the height and length of each part of the building(s) is apportioned into multiple segments. The approach is illustrated in **Figure 14**.

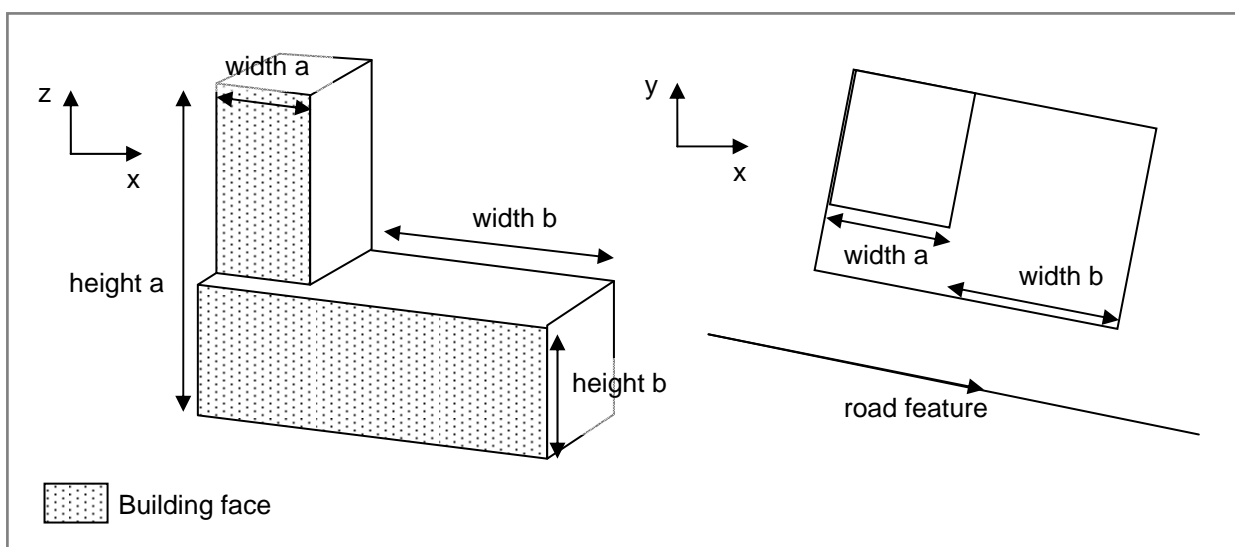


Figure 14 – Illustration of the approach taken with varying building height

The following limitations apply:

- A road with no adjacent buildings will be assigned values of 0 for all of the Advanced Canyon module parameters.
- Buildings that touch or cross the road centreline are ignored for the road segment which touches the centreline.
- A minimum building height of 1 m is required for the building to be included in the calculation for any road segment.
- Multipart roads are ignored. Multipart buildings will be included in the calculations, provided they do not have “holes” (internal rings).

3.2.2 Calculating the Advanced Canyon module parameters

The Advanced Canyon module parameters listed in **Table 2** are calculated from the projected extent of the buildings that are deemed to affect the road, for each road feature and side of the road, based on the user-defined tolerances (refer to Sections 2.3.8.1 and 2.3.8.2). **Figure 12** presents the Advanced Canyon module parameters schematically.

The start of the canyon, (named `endLength_<side>` in the `*.csv` file and `c_start_<l or r>` in the shapefile), is defined as the distance from the first road vertex to the first building within the buffer calculated from the Building distance tolerances. The length of the canyon is determined from that start point to the last building within the buffer around the road, such that it includes gaps. The canyon width and maximum, minimum and average height are only calculated for sections of the road considered to be within a canyon (where a building occurs within the buffer region). There is no double-counting: if a portion of the road is affected by multiple buildings, the width to the nearest point of the nearest building is used. The length of buildings in a canyon is calculated as the length of buildings within the canyon length, excluding gaps between buildings.

CERC

Cambridge Environmental Research Consultants Ltd
3 King's Parade, Cambridge, CB2 1SJ, UK
Tel: +44 (0)1223 357 773, Fax: +44 (0)1223 357 492
Email: help@cerc.co.uk
Website: www.cerc.co.uk